

Conventional Hermetic Packaging



PS Technologies Corporation 111 South Worcester Street Norton, MA 02766 508-222-0614 sales@alsic.com

Glass to Metal Seals for High Reliability Microelectronic Packaging

- Military and Aerospace Applications
- Hermetic Sealed Housings
- Commercial Applications

Housing Formats

- Power Headers
- AlSiC Hermetic Packages
- Machined Modules
- Plug in Packages
- Flat Packs
- TO-5 and TO-8
- TO-3 and TO-66
- Lids & Covers


Housing Materials

- AlSiC base with 48 alloy frame
- ASTM F-15 Kovar
- Cold Rolled Steel
- Stainless Steel
- Alloy 52
- Copper Cored Alloy 52
- Molybdenum
- Aluminum
- Copper, CuMo, CuW

Hermetic Seals

- Thermal Expansion Matched Seal
- Borosilicate
- Compression Seals
- Ceramic feedthrus

CPS matched seals are produced by the "Two Step Sealing Process" for the most robust hermetic seal.

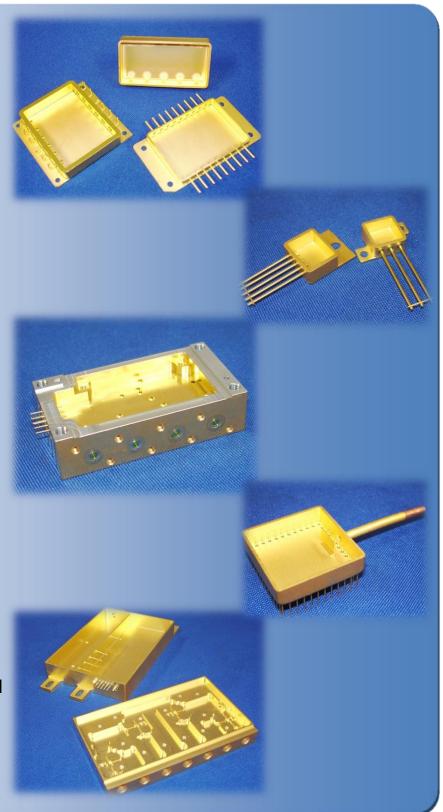



Conventional Hermetic Packaging



PS Technologies Corporation 111 South Worcester Street Norton, MA 02766 508-222-0614 sales@alsic.com

CPS Certified to ISO 9001:2008 Standard

CPS provides quality assurance testing to MIL-STD 883 and MIL-STD 202; CPS is compliant to DFARS clause 252.225-7014 ALT.1, RoHS and REACH.

CPS Matched Hermetic Seals

CPS matched seals are produced by the "Two Step Sealing Process" for the most robust hermetic seal.

CPS Plating Capabilities

- Electroless Nickel per MIL-C-26074, ASTM B-733 & AMS 2404
- Electrolytic Nickel per QQ-N-290 and ASTM B-689
- Gold per ASTM B-488 and MIL -DTL-45204
- Chromate per MIL-DTL-5541

CPS Test Capabilities

- Air to Air temperature cycle/shock per MIL-STD-883, method 1010
- Steam age/solderability testing per MIL-STD-883, method 2003
- Liquid to Liquid per MIL-STD-883, method 1011
- Lead Fatigue per MIL-STD-883, method 2004
- Hermeticity validation to 1 x 10⁻¹⁰cc/sec of helium per MIL-STD-883, method 1014, condition A4
- Insulation resistance to 10 G Ω at 500 VDC per MIL-STD-883, method 1003
- Salt spray per MIL-STD-883, method 1009
- Compliance to JEDEC Std. 9 and MIL-STD-883

DUNS # 12-099-8661

CAGE Code 46613

Registered with the U.S Dept. of State Trade Directorate of Defense (ITAR)



AlSiC Hermetic Packaging

CPS Technologies Corporation 111 South Worcester Street Norton, MA 02766 508-222-0614 sales@alsic.com

AISiC Hermetic Packaging Advantages


- 40 60% lighter weight than CuMo and CuW
- Lower cost than CuMo and CuW
- Thermal expansion matching for direct attachment of GaAs and substrates
- High thermal conductivity
 - AISiC-9: 180 W/mK minimum
- Readily available material
 - Standard and non-standard base thicknesses
 - Complex shapes without machining
- Meets MIL-PRF-38534, Appendix C, Table-VI


Applications

- Military, aerospace and communications applications
- Systems subject to shock and vibration
- Weight sensitive applications

Hermetic Seals

- Thermal expansion matched seal
 - CPS matched seals are produced by the "Two Step Sealing Process" for the most robust hermetic seal
- Brazed ceramic feedthrus for high power applications

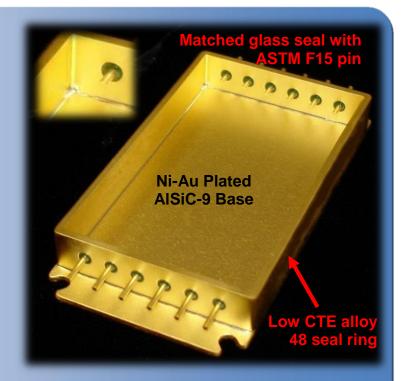

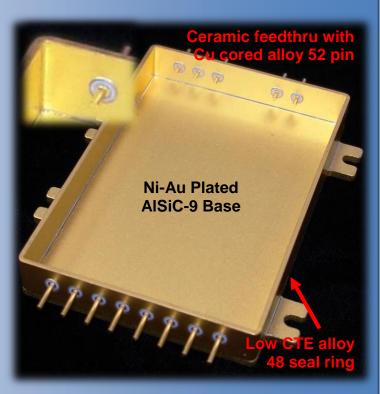



AlSiC Hermetic Packaging

CPS Technologies Corporation 111 South Worcester Street Norton, MA 02766 508-222-0614 sales@alsic.com

CPS Certified to ISO 9001:2008 Standard

CPS provides quality assurance testing to MIL-STD 883 and MIL-STD 202; CPS is compliant to DFARS clause 252.225-7014 ALT.1, RoHS and REACH.

CPS Matched Hermetic Seals

CPS matched seals are produced by the "Two Step Sealing Process" for the most robust hermetic seal.

CPS Plating Capabilities

- Electroless Nickel per MIL-C-26074, ASTM B-733 and AMS 2404
- Electrolytic Nickel per QQ-N-290 and ASTM B-689
- Gold per ASTM B-488 and MIL-DTL-45204
- Chromate per MIL-DTL-5541

CPS Test Capabilities

- Air to Air temperature cycle/shock per MIL-STD-883, method 1010
- Steam age/solderability testing per MIL-STD-883, method 2003
- Liquid to Liquid per MIL-STD-883, method 1011
- Lead Fatigue per MIL-STD-883, method 2004
- Hermeticity validation to 1 x 10⁻¹⁰cc/sec of helium per MIL-STD-883, method 1014, condition A4
- Insulation resistance to 10 G Ω at 500 VDC per MIL-STD-883, method 1003
- Salt spray per MIL-STD-883, method 1009
- Compliance to JEDEC Std. 9 and MIL-STD-883
- o DUNS # 12-099-8661
- CAGE Code 46613
- Registered with the U.S. Dept. of State Trade Directorate of Defense (ITAR)